



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

17. 02. 03

REC'D 25 FEB 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02076224.1

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 02076224.1  
Demande no:

Anmeldetag:  
Date of filing: 29.03.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Optical disc apparatus for recording and/or reproducing information on/from an  
information surface of a rotatable optical disc

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G11B7/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

Optical disc apparatus for recording and/or reproducing information on/from an information surface of a rotatable optical disc

EPO - DG 1

29 03. 2002

(72)

The present invention relates to an optical disc apparatus for recording and/or reproducing information on/from an information surface of a rotatable optical disc.

An optical disc apparatus of the kind indicated above is known from US-A Patent 6,052,357. This document describes an optical disc apparatus for recording and/or reproducing information on/from an information surface of a rotatable optical disc, comprising a supporting assembly and a spindle motor associated with the supporting assembly having a spindle with a spindle axis for rotating the optical disc mounted on the spindle about the spindle axis. An optical lens unit is associated with the supporting assembly for scanning an information surface of the optical disc mounted on the spindle. The optical lens unit comprises a focussing lens assembly having a movable focussing lens having a focussing lens area bounded by a focussing lens periphery and a focussing axis intersecting the focussing lens area, which focussing lens assembly is adapted to focus an optical beam on the information surface of the optical disc. A swing arm assembly is provided which comprises a generally elongate swing arm structure mounting the focussing lens assembly at a free end. The swing arm assembly is rotatable about a swing axis spaced from the free end and directed generally perpendicular to the swing arm structure and generally parallel to the spindle axis and the focussing axis, such that the swing arm assembly sweeps a plane generally parallel to the information surface of the mounted optical disc, the swing arm assembly thereby causing the focussing lens assembly to scan over the information surface of the mounted optical disc. The swing arm assembly also comprises movable magnetic focussing means near the free end of the swing arm associated with the swing arm assembly for driving the focussing lens along the focussing axis to focus the optical beam on the optical disc information surface.

In order to focus the optical beam on the optical disc information surface this known optical disc apparatus further comprises stationary magnetic focussing means associated with the supporting assembly which magnetically cooperates through an intermediate air gap with the movable focussing means for generating a magnetic force vector having a vector component parallel to the focussing axis of the focussing lens

assembly in order to drive the focussing lens assembly along the focussing axis by electromagnetic force.

In this prior art optical disc apparatus, the movable magnetic focussing means are comprised of magnetic focussing coil means disposed in a plane which is generally parallel to the focussing axis of the focussing lens at the free end of the swing arm structure at a location spaced from the focussing lens assembly at the remotest part of the swing arm structure as seen from the swing axis thereof. Focussing movements of the focussing lens assembly in a direction according to its focussing axis are enabled by the fact that the swing arm structure comprises two spaced elongate generally parallel flat resilient arm elements extending intermediate the swing axis and the focussing lens assembly, interconnected at or near the free end of the swing arm assembly. The stationary magnetic focussing means cooperate with the above mentioned magnetic coil means over an airgap which is generally parallel to the magnetic coil means and therefore generally parallel to the focussing axis of the focussing lens.

Any magnetic force vector acting through the air gap on the focussing coil of the movable magnetic focussing means of the prior art arrangement described will exert on the focussing lens not only a force along the focussing axis, but also a perpendicular force. Moreover these forces act on the focussing lens assembly and therefor on the swing arm assembly at some distance from the focussing axis of the focussing lens, resulting in force moments exerted on the resilient arm elements of the swing arm assembly. Thus eccentric forces and moments are dynamically produced during focussing of the focussing lens which will produce dynamic reaction forces and moments in the swing arm assembly which may cause undue vibrations and distortions as well as added loading on the swing arm spindle. Undesirable parasitic resonance may result in the direction along the focussing axis, upsetting the automatic focussing control system of the optical lens unit. Also cross talk may result in the scanning direction perpendicular to the focussing direction, upsetting the automatic scanning control system.

It is an object of the invention to provide an optical disc apparatus which exhibits improved dynamic behavior by mitigating the occurrence of any undue eccentric dynamic focussing forces exerted on the movable magnetic focussing means. This object is achieved by the optical disc apparatus of the invention which comprises

---

- a supporting assembly;

---

- a spindle motor associated with the supporting assembly, having a spindle with a spindle axis for rotating an optical disc supported by the spindle about the spindle axis;
- an optical lens unit associated with the supporting assembly for scanning an information surface of said optical disc and comprising:

5           - a focussing lens assembly having a movable focussing lens having a focussing lens area bounded by a focussing lens periphery and a focussing axis intersecting said focussing lens area, said focussing lens assembly being adapted for focussing an optical beam on said information surface;

10           - a swing arm assembly comprising a generally elongate swing arm structure mounting the said focussing lens assembly at a free end, the swing arm assembly being rotatable about a swing axis spaced from said free end and directed substantially perpendicular to the swing arm structure and generally parallel to the said spindle axis, the swing arm assembly further comprising a movable magnetic focussing means provided near the said free end of the swing arm assembly for driving said focussing lens along said focussing axis for focussing the said optical beam on the optical disc information surface;

15           which optical disc apparatus further comprises:

20           - a stationary magnetic focussing means associated with the supporting assembly for magnetically cooperating through an intermediate air gap with said movable focussing means for generating a magnetic force vector having a vector component parallel to the said focussing axis for driving the focussing lens assembly along said focussing axis, and has the feature, that the stationary and movable magnetic focussing means are disposed such and cooperate such that the force vector component intersects the focussing lens area. By this feature the force vector will be situated near to the focussing axis, thus mitigating the above discussed problems of the prior art arrangements.

25           Preferably an embodiment is used wherein the force vector component generally coincides with the focussing axis of the focussing lens. With this embodiment substantially no eccentric forces are exerted on the focussing lens assembly.

30           With optical disc apparatus of the kind in which the invention may be advantageously applied, much of the optical lens unit associated with the supporting assembly, such as the laser source and the associated optical and electronic means necessary to send data to and/or receive data from the information disc will be located near the swing axis of the swing arm assembly to reduce the inertia thereof. The laser beam will travel in along a section of the light path between the focussing lens assembly and the laser source which intersects the focussing axis of the focussing lens assembly perpendicularly. An

embodiment of the invention of the kind in which the laser beam intersects the focussing axis perpendicularly is interesting, wherein the optical lens assembly comprises near the free end of the arm assembly a perpendicularly reflecting optical element connected to the focussing lens, having a reflective surface on the side of the focussing lens directed away from the  
5 information surface of a mounted optical disc causing reflection of a laser beam travelling in the general direction between the swing axis and the focussing axis to travel through the focussing lens generally along the focussing axis and wherein the movable magnetic focussing means are connected to the reflecting element at a position on the side of the reflecting surface directed away from the movable focussing lens. The magnetic focussing  
10 means may thus be positioned on the focussing axis of the focussing lens.

---

The previous embodiment may be advantageously combined with a further embodiment of the invention, wherein the swing arm assembly is bounded by spaced virtual parallel flat planes extending perpendicular to the swing axis, a first plane being nearer to a mounted optical disc and a second plane being more remote from a mounted optical disc; at  
15 least a portion of the reflecting element is inwardly spaced from the second plane so that an intermediate space is provided between the reflecting element and the second plane; and the stationary magnetic focussing means extend into the intermediate space between the reflecting element and the second plane, thereby occupying at least a portion of the intermediate space. This embodiment will contribute to minimize the space requirements for  
20 the movable and stationary magnetic focussing means. Reduction of the overall dimension of optical disc apparatus, particularly for data storage, is highly desirable in order to increase the field of use to the incorporation in ever smaller information technology and communications devices. Interesting in this respect is a further embodiment, wherein the movable and stationary magnetic focussing means cooperate through an air gap which is generally parallel  
25 to the reflecting surface of the reflecting element.

To minimize the inertia of the optical lens unit, and the overall dimensions of the optical disc apparatus, the latter embodiment may be combined with a further embodiment, wherein the reflecting surface of the focussing lens assembly is disposed in an inclined plane relative to the swing axis of the swing arm assembly; the movable electrical  
30 magnetic coil means are disposed generally in an inclined plane parallel to the reflecting surface; and the stationary magnetic circuit means comprise an inclined face directed to the movable electrical magnetic coil means, such that the air gap between the movable electrical magnetic coil means and the stationary magnetic circuit means is disposed in an inclined plane generally parallel to the inclined reflective surface of the focussing lens assembly.

---

To reduce the inertia of the swing arm assembly and to provide resilient guidance means for the focussing lens assembly a further embodiment of the invention may be used, wherein the swing arm structure comprises two spaced elongate generally parallel flat resilient arm elements extending intermediate the swing axis and the focussing lens assembly, interconnected at or near the free end of the swing arm assembly by the focussing lens assembly.

The embodiments of the apparatus according to the invention are detailedly defined in the claims 2 to 8.

The objects and features of the present invention will become more apparent by referring to the following non-limiting description of a preferred embodiment given with reference to the accompanying drawings in which:

FIG. 1 is a schematic side view of an embodiment of an optical disc apparatus according to the invention;

FIG. 2 is a top view of a section of the optical disc apparatus of Fig. 1; and

FIG. 3 is an enlarged schematic side view in cross section showing details of the focussing lens assembly and the associated movable and stationary magnetic focussing means of the optical disc apparatus of Figures 1-2

The drawing are of a schematic nature and intended for illustrative purposes only. The details in the figures are drawn to an arbitrary scale which may be different from the overall scale. The same components are indicated by the same reference number throughout the figures. Components and assemblies which may be configured according to principles which are basically known from the prior art will not be discussed in detail.

Figures 1 and 2 show an overall configuration of an optical disc apparatus 1 for recording and/or reproducing information on/from an information surface 3 of a rotatable optical disc 5. The apparatus comprises a supporting assembly 7 with side walls 9,11 and a bottom wall 13. The supporting assembly is only partly shown and may be of an arbitrary configuration but in many cases will be generally box shaped.

A spindle motor 15 is provided on the bottom wall 13 of the supporting assembly 7, having a spindle 17 with a spindle axis 19 for rotating the optical disc 5 about the spindle axis 19. The optical disc may be mounted on or put on and/or clamped to the spindle.

An optical lens unit 21 is provided on a raised part 22 provided on the bottom surface 13 of the supporting assembly 7 for scanning the information surface 3 on the bottom side of the optical disc 5 mounted on the spindle 17. The optical lens unit 21 comprises a focussing lens assembly generally referred to at 23 having a movable focussing lens 25  
5 having a focussing lens area 27 bounded by a focussing lens periphery 29 and a focussing axis 31 intersecting the focussing lens area, the focussing lens assembly 23 being adapted for focussing an optical beam 33 on the information surface 3 of the optical disc 5. The focussing axis 31 is substantially parallel to the spindle axis 19.

A swing arm assembly 35 is provided which configured as a generally  
10 elongate swing arm structure mounting the focussing lens assembly 23 at a free end 37. The swing arm assembly is rotatable about a swing axis 39 spaced from the free end 37 and directed generally perpendicular to the swing arm structure and generally parallel to the spindle axis 19 and the focussing axis 31, such that the swing arm assembly 35 sweeps a  
15 plane generally parallel to the information surface 3 of the mounted optical disc 5, the swing arm assembly 35 thereby causing the focussing lens assembly 23 to scan over the information surface 3 of the mounted optical disc 5. In the embodiment shown in the drawings a swing arm spindle 41 is provided for the swing arm assembly on the raised part 22. The swing arm assembly has a generally two armed configuration having a second free end 43 remote from the free end 37. The spindle 41 is disposed between the free ends 37 and 43.

20 The swing arm assembly 35 further comprises movable magnetic focussing means 45 provided near the free end 37 for electromagnetically driving the focussing lens 25 along the focussing axis 31 to focus the optical beam 33 on the optical disc information surface 3. In the present embodiment the moving magnetic focussing means consist in a manner which is known *per se* of an generally annular focussing coil 45 of windings of  
25 conductive wire such as copper wire. The focussing coil 45 may have a generally oval or rectangular shape such as well known in the art and is shown in figure 3 in cross section.

The optical disc apparatus 1 further comprising stationary magnetic focussing means 46 associated with the supporting assembly 7 for magnetically cooperating through an intermediate air gap 48 with the movable focussing means 45 for generating a magnetic force  
30 vector having a vector component F which is parallel to the focussing axis 31 for driving the focussing lens assembly 23 along the focussing axis 31. In the present embodiment the stationary magnetic focussing means consist in a manner well known in the art of a vertically magnetized permanent magnet 57 bounded by ferromagnetic flux concentrating upper and

lower yoke plates 59 and 61 respectively, mounted on a lower support of suitable magnetically isolating material.

The stationary and movable magnetic focussing means 45,46 are disposed such and cooperate such that the force vector component P intersects the focussing lens area 27 bounded by the focussing lens periphery 29. In fact, with the embodiment shown in the drawings, the force vector component P generally coincides with the focussing axis 31 of the focussing lens 27.

The optical lens assembly 23 comprises near the free end 37 of the arm assembly a perpendicularly reflecting optical element 47 which is connected to the focussing lens 27 and in the present embodiment is integral therewith, manufactured from an optical grade transparent synthetic resin material as an integral optical component having a reflecting surface 49 on one side which reflects the optical beam 33 by total inner reflection. This reflective surface 49 is disposed on the side of the focussing lens 25 which is directed away from the information surface 3 of a mounted optical disc 5 and causes reflection of the laser beam 33 travelling in the general direction between the swing axis 39 and the focussing axis 31 to travel through the focussing lens 25 generally along the focussing axis 31. The movable magnetic focussing means 45 are connected to the reflecting element 47 at a position on the side of the reflecting surface 49 directed away from the movable focussing lens 25.

The swing arm assembly is bounded by spaced virtual parallel flat planes 51,53 (symbolically shown by dotted lines in section in Fig. 3) extending perpendicular to the swing axis 39, a first plane 51 being nearer to a mounted optical disc 5 and a second plane 53 being more remote from a mounted optical disc 5.

The reflecting element 47 is inwardly spaced from the second plane 53 so that an intermediate space 55 is provided between the reflecting element 47 and the second plane 53. The stationary magnetic focussing means 46 extend into this intermediate space 55 between the reflecting element 47 and the second plane 53, thereby occupying a portion of the intermediate space 55.

The movable and stationary magnetic focussing means 45,46 cooperate through an air gap 48 which is generally parallel to the reflecting surface 49 of the reflecting element 47. In fact, the focussing coil 45 is fixed on the outer surface of the reflecting element 47 using a suitable adhesive material which will not deteriorate the inner reflective properties of the reflective surface 49. Preferably the reflecting surface 49 is optically isolated by a suitable material such as a metal layer deposited by vacuum deposition.

The reflecting surface 49 of the focussing lens assembly 23 is disposed in an inclined plane relative to the swing axis 39 of the swing arm assembly 35. The movable electrical magnetic coil means 45 are disposed generally in an inclined plane parallel to the reflecting surface 49 and the stationary magnetic circuit means 46 comprise an inclined face 65 directed to the movable electrical magnetic coil means 45, such that the air gap 48 between the movable electrical magnetic coil means 45 and the stationary magnetic circuit means 46 is disposed in an inclined plane generally parallel to the inclined reflective surface 49 of the focussing lens assembly 23.

The swing arm structure comprises two spaced elongate generally parallel flat resilient arm elements 67,69 extending intermediate the swing axis 39 and the focussing lens assembly 23, interconnected at or near the free end 37 of the swing arm assembly 35 by the focussing lens assembly 23.

At the end of the swing arm structure remote from the focussing lens assembly 23, an magnetic system of a general kind known *per se* from the prior art is provided to drive the swinging movements of the swing arm assembly 35 about the intermediate swing axis 41. This magnetic system is not in itself part of the invention and therefore is not shown in detail in the drawings. It comprises an electrical coil 73 attached to the free end 43 of the swing arm structure, as well as a cooperating stationary permanent magnetic circuit associated with the supporting assembly 7. This circuit is shown only symbolically in the drawings by dashed lines and is denoted by the general reference number 71.

The central part 75 of the swing arm assembly 35 may be hollow and box shaped and may contain components of the optical system cooperating with the focussing lens assembly 23 and the reflecting surface 3 of the optical disc 5 such as a semiconductor laser generating the laser beam 33 as well as further associated optical and electronic means for modifying the properties and the direction of the laser beam, processing signals, etc.

Thus an optical disc apparatus has been described according to a best mode for carrying out the invention contemplated by the inventor at the time of writing the present specification. It will be appreciated by persons skilled in the art that the invention is not limited by what has been particularly described and shown above. Many modifications are possible without departing from the inventive concepts herein. The swing arm assembly does not need to be of the two-arm type but could be of the one-arm type having its swing axis at one end of the swing arm assembly. The focussing lens assembly does not need to be suspended in leaf springs of a swing arm structure. Instead the swing arm structure could be rigid and the focussing lens assembly could be mounted resiliently on the rigid structure. The

total height dimension of the optical disc apparatus could be reduced by suitable measures to reduce the heights of the raised portion 22 of the arm spindle support as well as the support 63 of the stationary magnetic means 46 as much as possible. If minimal overall dimensions are preferred, than preferably the whole swing arm assembly could be comprised between the  
5 virtual planes 51,53 of the swing arm structure. The integrated focussing lens assembly could be replaced by a multiple component assembly including a separate mirror having an exterior reflective surface instead of the inner totally reflecting surface 49. The movable magnetic focussing could be disposed in a plane different from the plane of the reflecting surface 49 and under a different angle. For example a vertically disposed magnetic coil could be used  
10 located beneath the focussing lens assembly 23 cooperating with a stationary magnetic circuit having a central vertical curved slot in which the magnetic coil may move.

## CLAIMS:

29 03. 2002

(72)

1. Optical disc apparatus for recording and/or reproducing information, comprising:

- a supporting assembly;

5 - a spindle motor associated with the supporting assembly, having a spindle with a spindle axis for rotating an optical disc supported by the spindle about the spindle axis;

- an optical lens unit associated with the supporting assembly for scanning an information surface of said optical disc and comprising:

10 - a focussing lens assembly having a movable focussing lens having a focussing lens area bounded by a focussing lens periphery and a focussing axis intersecting said focussing lens area, said focussing lens assembly being adapted for focussing an optical beam on said information surface;

15 - a swing arm assembly comprising a generally elongate swing arm structure mounting the said focussing lens assembly at a free end, the swing arm assembly being rotatable about a swing axis spaced from said free end and directed substantially perpendicular to the swing arm structure and generally parallel to the said spindle axis, the swing arm assembly further comprising a movable magnetic focussing means provided near the said free end of the swing arm assembly for driving said focussing lens along said focussing axis for focussing the said optical beam on the optical disc information surface;

the optical disc apparatus further comprising:

20 - a stationary magnetic focussing means associated with the supporting assembly for magnetically cooperating through an intermediate air gap with said movable focussing means for generating a magnetic force vector having a vector component parallel to the said focussing axis for driving the focussing lens assembly along said focussing axis;

25 wherein the stationary and movable magnetic focussing means are disposed such and cooperate such that said force vector component intersects said focussing lens area.

2. Optical disc apparatus according to claim 1, wherein the said force vector component generally coincides with the focussing axis of the said focussing lens.

3. Optical disc apparatus according to claim 1 or 2, wherein

- the optical lens assembly comprises near the said free end of the arm assembly a perpendicularly reflecting optical element connected to the focussing lens, having a reflective surface on the side of the focussing lens directed away from the information surface of the optical disc, when supported by the spindle, causing reflection of a laser beam travelling in the general direction between the swing axis and the focussing axis to travel through the focussing lens generally along the focussing axis; and

- the movable magnetic focussing means are connected to the reflecting element at a position on the side of the said reflecting surface directed away from the movable focussing lens.

4. Optical disc apparatus according to claim 3, wherein

- the swing arm assembly is bounded by spaced virtual parallel flat planes extending perpendicular to the swing axis, a first plane being nearer to the optical disc, when supported by the spindle, and a second plane being more remote from said optical disc;

- at least a portion of the reflecting element is inwardly spaced from the said second plane so that an intermediate space is provided between the reflecting element and the said second plane; and

- the stationary magnetic focussing means extend into the said intermediate space between the reflecting element and the said second plane, thereby occupying at least a portion of the said intermediate space.

5. Optical disc apparatus according to any of claims 2-4, wherein the movable and stationary magnetic focussing means cooperate through an air gap which is generally parallel to the said reflecting surface of the reflecting element.

6. Optical disc apparatus according to any of the previous claims, wherein the stationary magnetic focussing means are configured as arcuate permanent magnetic circuit means and the movable magnetic focussing means are configured as electrical magnetic coil means.

7. Optical disc apparatus according to claim 6, wherein

- the reflecting surface of the focussing lens assembly is disposed in an inclined plane relative to the swing axis of the swing arm assembly;

- the said movable electrical magnetic coil means are disposed generally in an inclined plane parallel to the reflecting surface; and

- the said stationary magnetic circuit means comprise an inclined face directed to the said movable electrical magnetic coil means, such that the said air gap between the said  
5 movable electrical magnetic coil means and the said stationary magnetic circuit means is disposed in an inclined plane generally parallel to the said inclined reflective surface of the focussing lens assembly.

8. Optical disc apparatus according to claim 1, wherein the swing arm structure  
10 comprises two spaced elongate generally parallel flat resilient arm elements extending intermediate the swing axis and the focussing lens assembly, interconnected at or near the free end of the swing arm assembly by the focussing lens assembly.

29 03. 2002

(72)

## ABSTRACT:

Optical disc apparatus (1) for recording and/or reproducing information on/from an information surface (3) of a rotatable optical disc (5). The apparatus comprises a supporting assembly (7); a spindle motor (15) associated with the supporting assembly (7), having a spindle (17) with a spindle axis (19) for rotating the optical disc (5); an optical lens unit (21) associated with the supporting assembly (7) for scanning an information surface (3) of the said optical disc (5) mounted on the spindle (17) and comprising a focussing lens assembly (23); a swing arm assembly (35) which is rotatable about a swing axis (39) comprising movable magnetic focussing means (45) provided near a free end (37) of the swing arm assembly (35) for driving the said focussing lens (29) along said focussing axis (31) to focus the said optical beam (33) on the optical disc information surface (3); and stationary magnetic focussing means (46) magnetically cooperating through an intermediate air gap (48) with the movable focussing means (45).

The stationary and movable magnetic focussing means (46, 45) are disposed such and cooperate with the movable magnetic focussing means such that the force vector component (P) intersects a focussing lens area (27) bounded by a focussing lens periphery (29).

(Fig. 1)

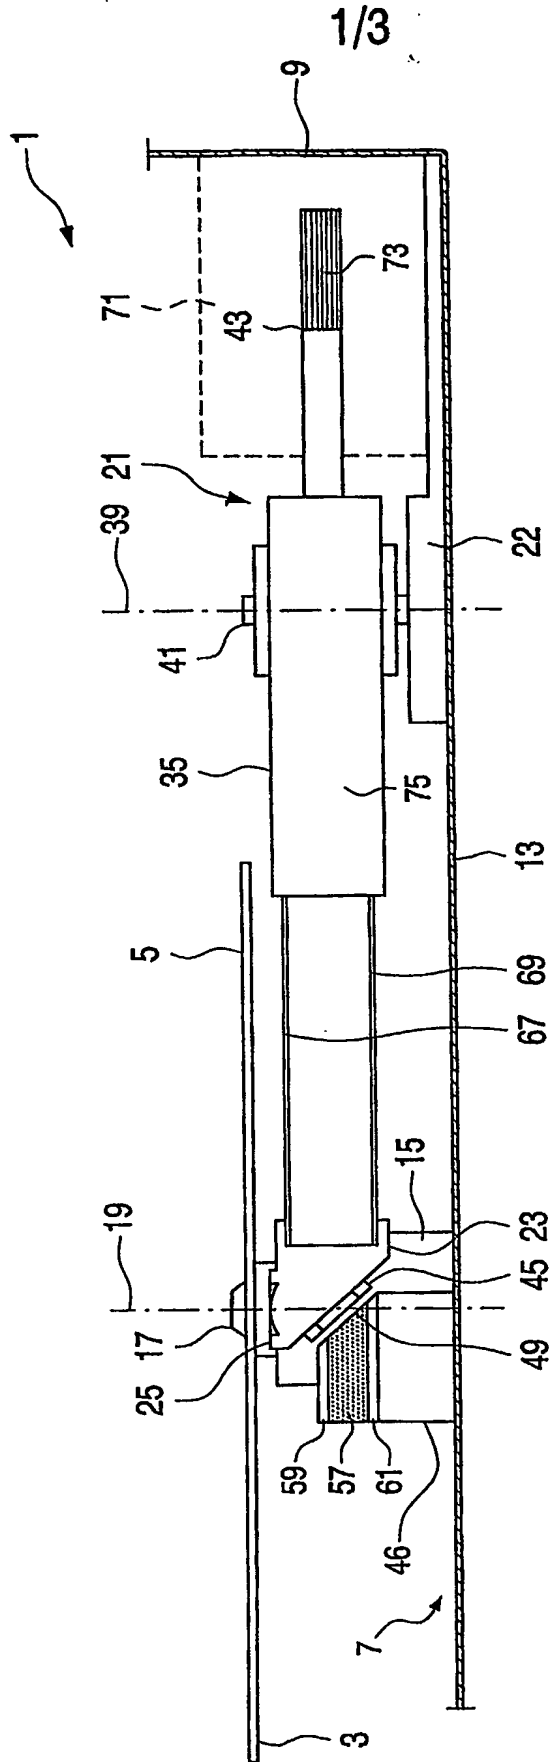


Fig.1

2/3

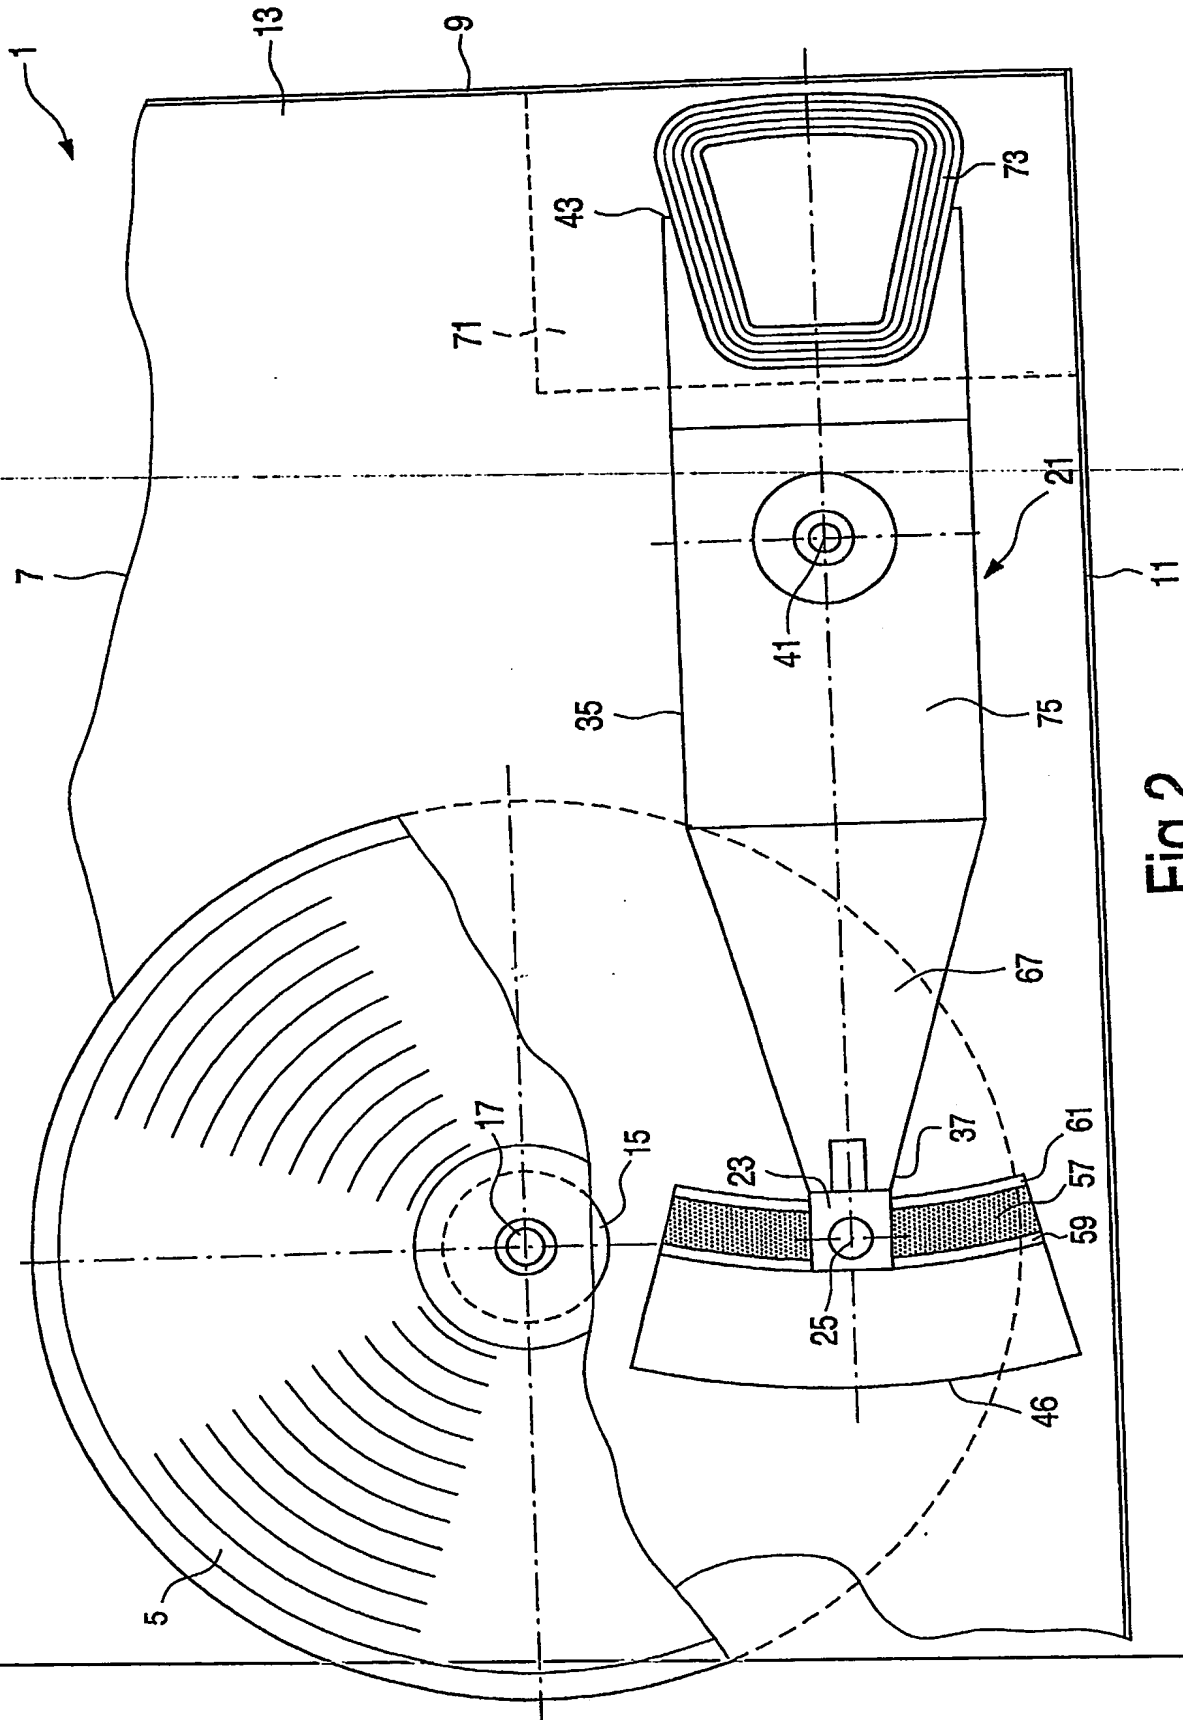


Fig. 2

